
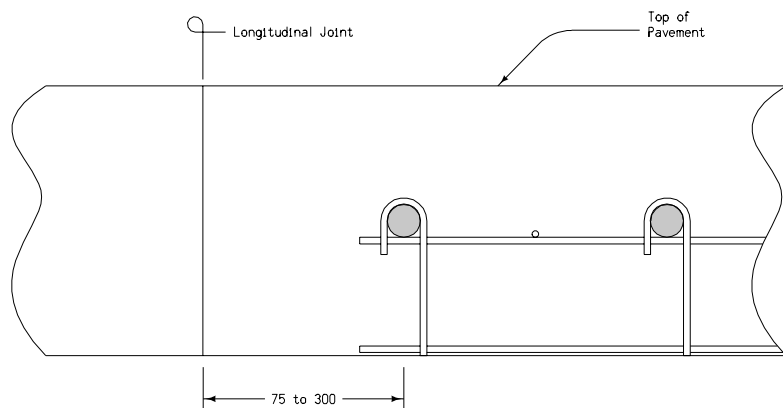


ELEVATION VIEW

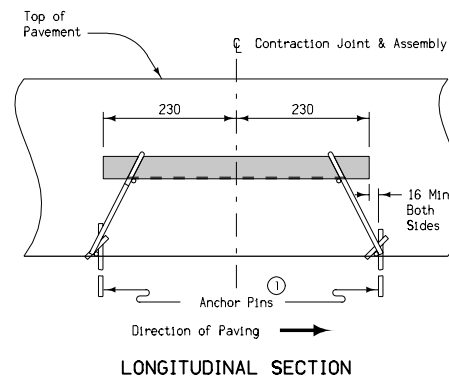

ELEVATION VIEW





GENERAL NOTES:

Details indicated on this plan apply to both transverse contraction and expansion joints. For additional details, see Standard Road Plan RH-50 and RH-52.

- ① Per lane width, a minimum of (8) anchor pins evenly spaced (4 per side), to prevent movement of assembly during construction. Assemblies placed on pavement or PCC base shall be anchored with devices approved by the Engineer.

All dimensions given in millimeters unless noted.

M METRIC VERSION	 Iowa Department of Transportation Highway Division	
	STANDARD ROAD PLAN	RH-58
	REVISION: Revise note number 1.	REVISION NO. 1
	 APPROVED BY DESIGN METHODS ENGINEER	REVISION DATE 04-20-04
DOWEL ASSEMBLY PLACEMENT DETAILS		